



Safe Harbor Notice


The information herein contains forward-looking statements. We have based these forward-looking statements on our current expectations and projections about future events. Although we believe that these expectations and projections are reasonable, such forward-looking statements are inherently subject to risks, uncertainties and assumptions about us, including, among other things: the intensely competitive semiconductor, LED and LCD industries and markets; Cyclical nature of the semiconductor industry; Risks associated with global business activities; General economic and political conditions; Other risks identified in our annual report for the year ended December 31st, 2010. All financial figures discussed herein are prepared pursuant to ROC GAAP on an un-audited unconsolidated basis. All audited figures will be publicly announced upon the completion of our audited process.

1



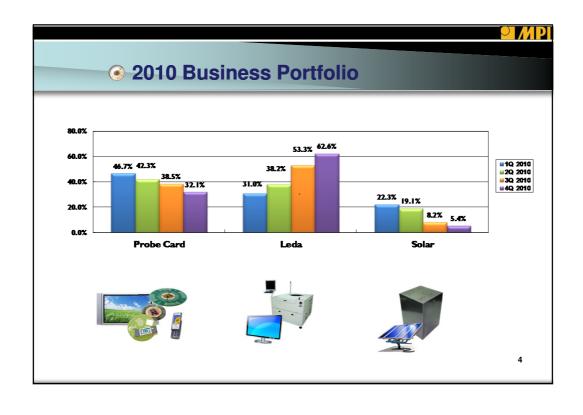

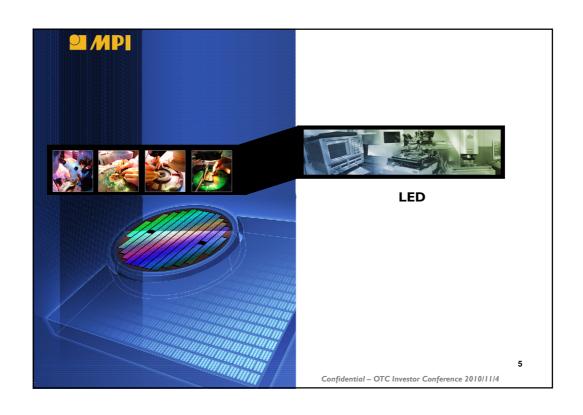

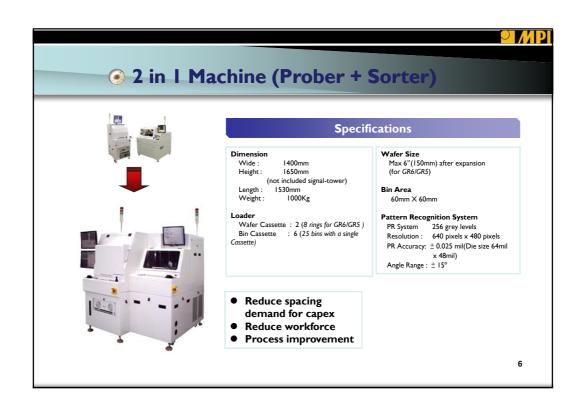









Specifications

Loader: Parts feeder

Applicable device: Chip type LED

Number of test station: I (2: option)

Test method: Side or top surface contact

Cycle time: Max0.15 sec/pcs (UPH24K)

(Including 90msec test time)


Number of bin: 256 bulk bins


Vacuum source:Vacuum pump


Size:W1,160 x H1,458 x D788(mm)


7



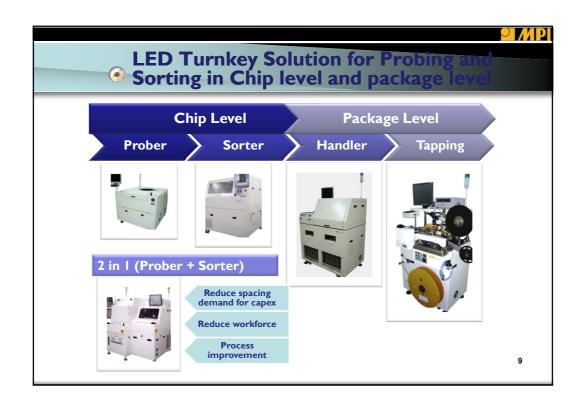

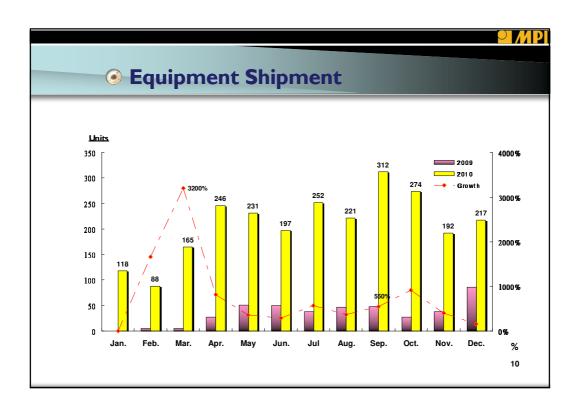

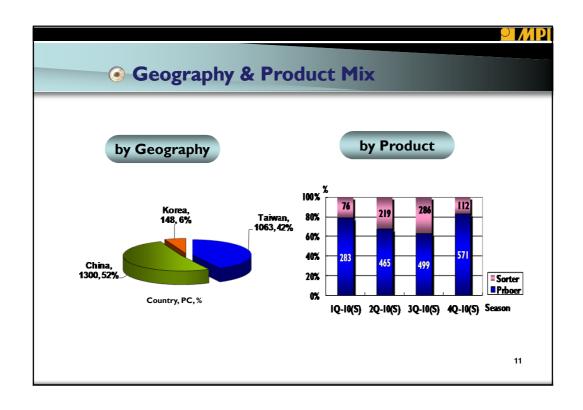

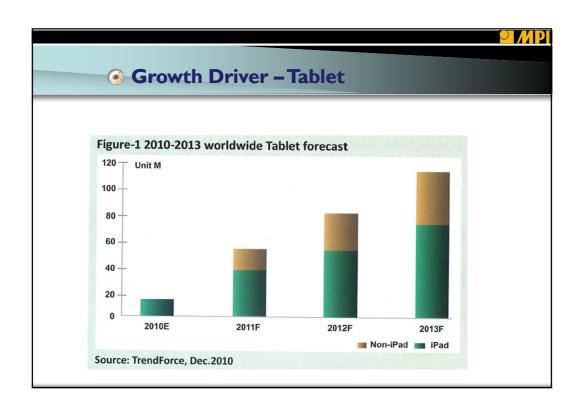

011 LED Penetration Rate by Quarter						
Application	Panel	1Q11	2Q11	3Q11	4Q11	2011
Monitor	Total	47,689	49,080	52,657	49,279	198,705
	LED	14,882	23,582	36,347	34,546	109,357
	P/R	31.2%	48.0%	69.0%	70.1%	55.0%
NB+Net	Total	67,132	74,625	80,679	70,521	292,957
	LED	65,503	73,312	79,474	69,886	288,175
	P/R	97.6%	98.2%	98.5%	99.1%	98.4%
TV	Total	54,907	56,842	66,518	63,615	241,882
	LED	14,321	21,397	33,410	35,111	104,239
	P/R	26,1%	37.6%	50.2%	55.2%	43.1%

